


DINO[®] 210XT

**DINO lifting power
for the urban jungle**



Technical specification on DINO® 210XT

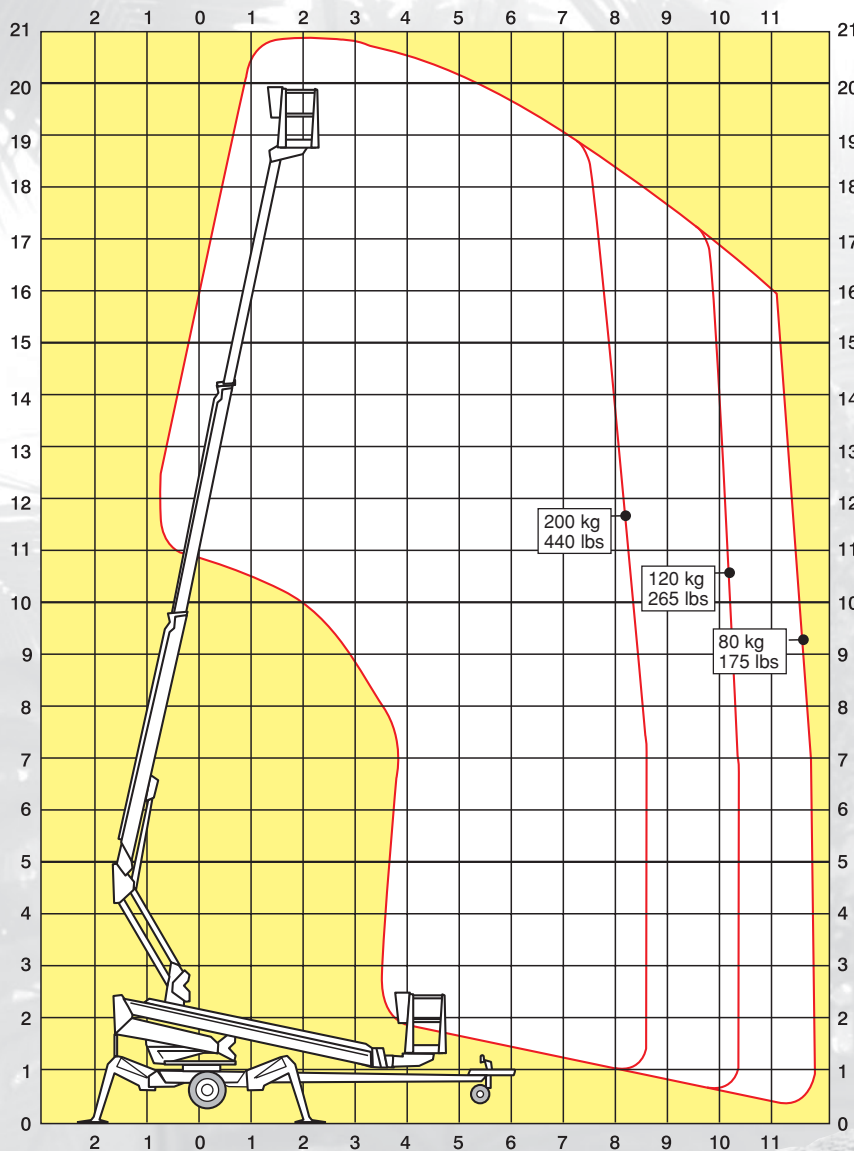

Working height	21.0 m	68'10"
Platform height	19.0 m	62'5"
Maximum outreach	11.7 m	38'5"
Support width	4.3 m	14'1"
Lifting capacity	215 kg	475 lbs
Basket size	0.7 x 1.3 m	2'4" x 4'3"
Boom rotation	continuous	continuous
Basket rotation	90°	90°
Boom control	proportional	proportional
Transport length	7.88 m	25'10"
Transport width	1.92 m	6'4"
Transport height	2.18 m	7'2"
Weight	2440 kg	5380 lbs
Driving system	standard	standard
AC-socket in the basket 230 V x 2	standard	standard
Power supply	110/230 VAC	110/230 VAC
Gradeability	25 %	25 %
Petrol aggregate	standard	standard

The specification is subject to change without notice.



The platform may be powered by mains electricity or petrol engine.




The driving system of the DINO 210XT is operated from the control box which is mounted on the side of the tow bar.



The unique stabiliser arrangement allows the DINO 210XT to be used on difficult ground conditions.

DINO® and Dino Lift® are trademarks registered by the company Dino Lift Oy.

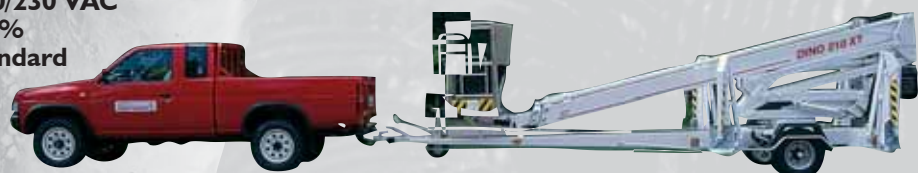

Manufacturer
DINO Lift®

Dealer

Dino Lift Oy, Raikkolantie 145, FI-32210 Loimaa, Finland
Tel. +358 2 76 25 900, Fax +358 2 76 27 160
E-mail: dino@dinolift.com, www.dinolift.com